





FLEECE BACKED FOR ADDED TOUGHNESS
















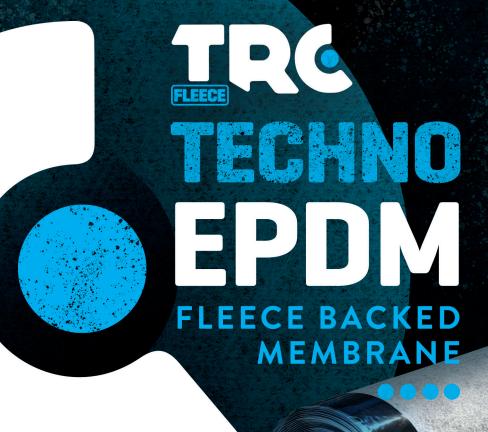

TRC FLEECE BACKED EPDM

...IS A 2.6MM ROOFING SOLUTION COMPRISING A 1.2MM TECHNO EPDM MEMBRANE VULCANISED TO A HEAVY DUTY, TOUGH, 300 GM POLYPROPYLENE FLEECE BACKING.

...FULLY ADHERES TO TIMBER SUBSTRATE WITH A SPECIALLY FORMULATED WATER-BASED ADHESIVE, AND TO ANY OTHER SUBSTRATE WITH A SPRAY-APPLIED CONTACT ADHESIVE.



The membrane is available in roll widths of 1.52m and 3.05m, which are 15.25m long. A 75mm splice tape is pre-installed along one long edge.



Some fleece backed products just use glue to join fleece and membrane together, but TRC Fleece Backed EPDM adheres the two during the production process by using state-of-the-art technology and vulcanisation.

✓ COVERS IMPERFECTIONS

Perfect for an uneven substrate or overlaying an existing roof where suitable.



Stripping off an existing felt or fibreglass roof and disposing of it is both time-consuming and expensive: instead, simply overlay directly with TRC Fleece Backed EPDM. LONGEVITY

Elasticity and elongation allow the membrane to move with the building. The membrane has a 50 year life expectancy and 25 year warranty.

SAFE & CERTIFIED

No hot works required when laying the membrane. TRC Fleece Backed EPDM has BROOF(t4) fire rating.

COMPREHENSIVE SYSTEM

TRC Fleece Backed EPDM is part of the full range of TRC adhesives, primers, trims and accessories.

REDUCED WASTE

Roll widths of 1.52m and 3.05m can be combined to best suit the roof size.

1.52M X 15.25M

CODE: TF0451.5M 23.18m², 51.52 kg per roll

3.05M X 15.25M

CODE: TF0453M 46.51m², 103.35 kg per roll









